

タイトル	Intuitive Manipulation to Mobile Robot by Hand Gesture
著者	FUKAYA, Ken-ichi; WATANABE, Atsushi
引用	北海学園大学工学部研究報告, 36: 143-151
発行日	2009-02-20

Intuitive Manipulation to Mobile Robot by Hand Gesture

Ken-ichi FUKAYA* and Atsushi WATANABE**

Abstract

We developed the intuitive manipulation apparatus by which a mobile robot moves by hand gesture of an operator. Static and dynamic acceleration and rotational velocity derived from declination, swing and rotation of hand are measured by acceleration sensors and the gyro sensor. Data of sensors are analyzed by H8/3052F micro computer attached to the apparatus. The hand gesture type judged is sent to a mobile robot and the robot acts according to its gesture type with announcing its manipulation. Experiment shows the feasibility of intuitive hand gesture manipulation to a mobile robot.

1. Introduction

A service robot performing partially or fully autonomously the services useful to the well-being will become a part of life just as the automobile, television and mobile phones [1]. To realize such a service robot, it is necessary to develop communication technology between a robot and a person. Recently, in the field of home appliance terminals and mobile devices, nonverbal communication such as gesture of a body, hands and fingers has been eagerly proposed and tried in the real world [2]~[6]. Hand gesture has been also tried to manipulate robots [7]~[9]. In this case, a vision sensor with high level performance of image processing is normally utilized in order to extract gesture images from noisy background and recognize their meanings on real time. There is a problem about the camera on a mobile robot that it does not always face robot user and sometimes miss his gesture. An omni-directional camera may give a solution to this problem, but its resolution is too poor to recognize correctly the gesture. Another way to recognize hand gesture is to utilize a data glove which uses optical fibers and detects the bending of fingers, as is utilized in virtual reality research. But this apparatus is too expensive to manipulate a mobile robot by hand gesture. In recent years, there appear inexpensive acceleration sensors and gyro sensors. These are mainly applied to an airbag of an automobile and a camera image stabilizer, respectively. In this research, inexpensive acceleration sensors and a gyro sensor are utilized to catch the hand gesture. By using this hardware, a mobile robot is intuitively ma-

* Department of Electronics and Information Engineering, Faculty of Engineering, Hokkai-Gakuen University

** Toyota Technical Development Corp.

nipulated by recognizing the hand gesture.

2. System configuration

Fig.1 shows the system configuration for manipulating the robot by the hand gesture. This system consists of the hand gesture apparatus, the control box, the host computer and the mobile robot.

Actual hardware of hand gesture apparatus and control box are shown in Fig.2 and Fig.3, respectively. The hand gesture apparatus has the two-dimensional 2G acceleration sensor (ADX1202JE by Analog Devices, Inc.) for hand declination, the three-dimensional 20G acceleration sensor (MA-3-20 Ac by MicroStone Corp.) for hand swing, the gyro sensor (MGQ1-01B by MicroStone Corp.) for hand rotation and a high light LED linked to an emergency switch. The control box is connected to the hand gesture apparatus, and has a micro computer (H8/3052 by Renesas Technology Corp.) which analyzes data from sensors and a switch built in the hand gesture apparatus. The analyzed result of hand gesture data is sent to the host computer via the Bluetooth serial communication module (Zeal-Z1 by ADC Technology Inc.). Then, the host computer sends gesture information of a hand to the board computer mounted on the mobile robot (Pioneer3 by MobileRobots Inc.) via connectionless process communication. Results of hand gesture are displayed on the LCD on the control box and at the same time, manipulation obeying to the kind of hand gesture is announced by the sound board

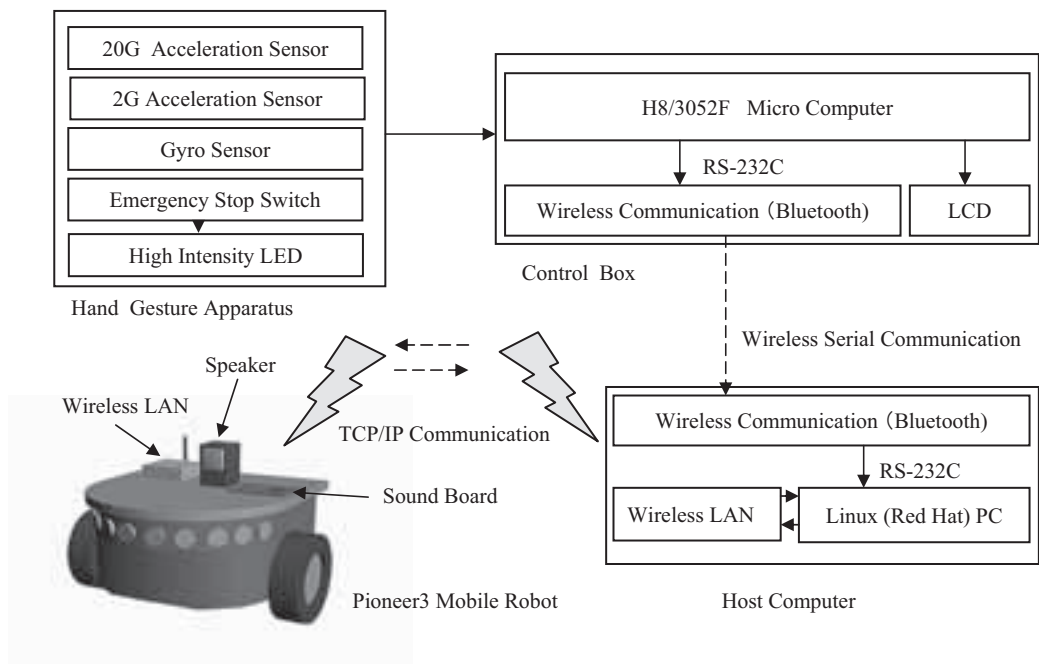


Fig. 1 System configuration

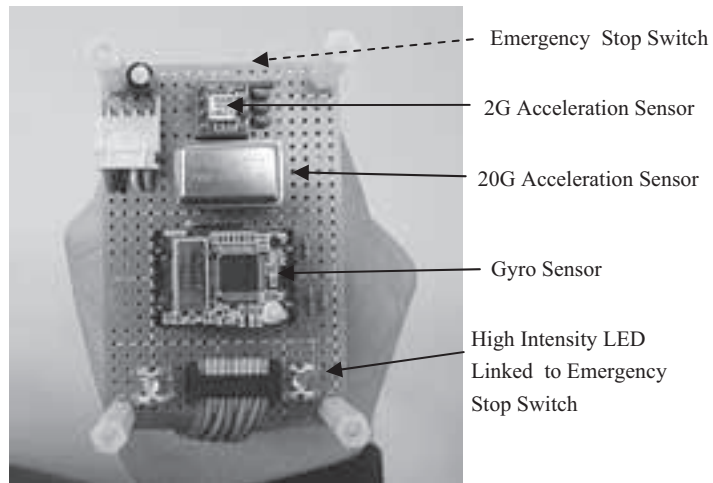


Fig.2 Hand gesture apparatus

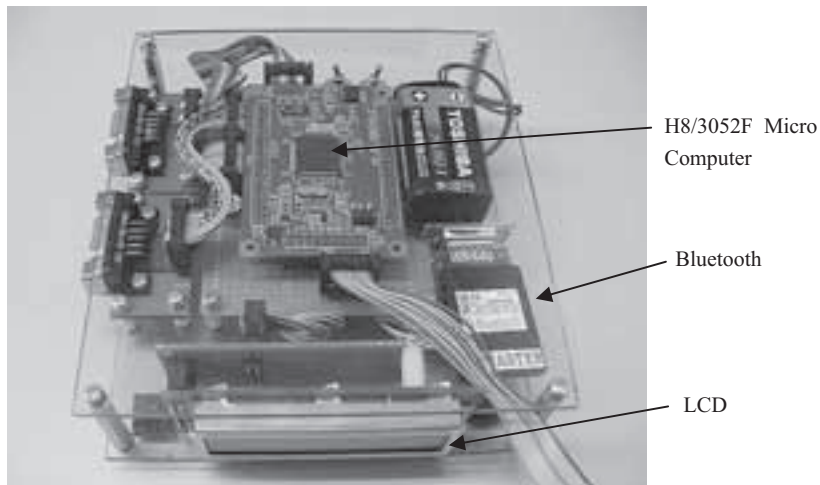


Fig.3 Control box

(SRM-10P by Alpha Project Co. Ltd.) mounted on the mobile robot.

3. Gesture Recognition

Three kinds of hand gesture (i.e. declination, swing and rotation) generate static acceleration (gravity), dynamic acceleration (vibration) and rotational speed, respectively, which are measured each by the 2G acceleration sensor, the 20G acceleration sensor and the gyro sensor (Fig.4).

Fig.5 is the flow chart to recognize hand gesture. By preparatory experiments, the threshold of each sensor has been estimated. When the 2G sensor detects the absolute value less than 0.6G, hand gesture is ignored and the processing is returned to start. When the 20G sensor detects the absolute value

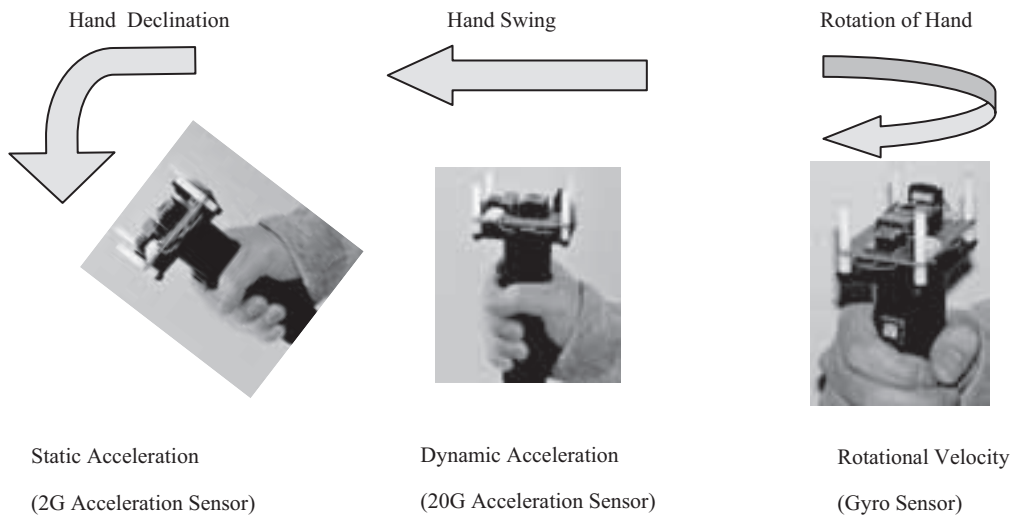


Fig. 4 Three kinds of hand gesture and sensors corresponding each

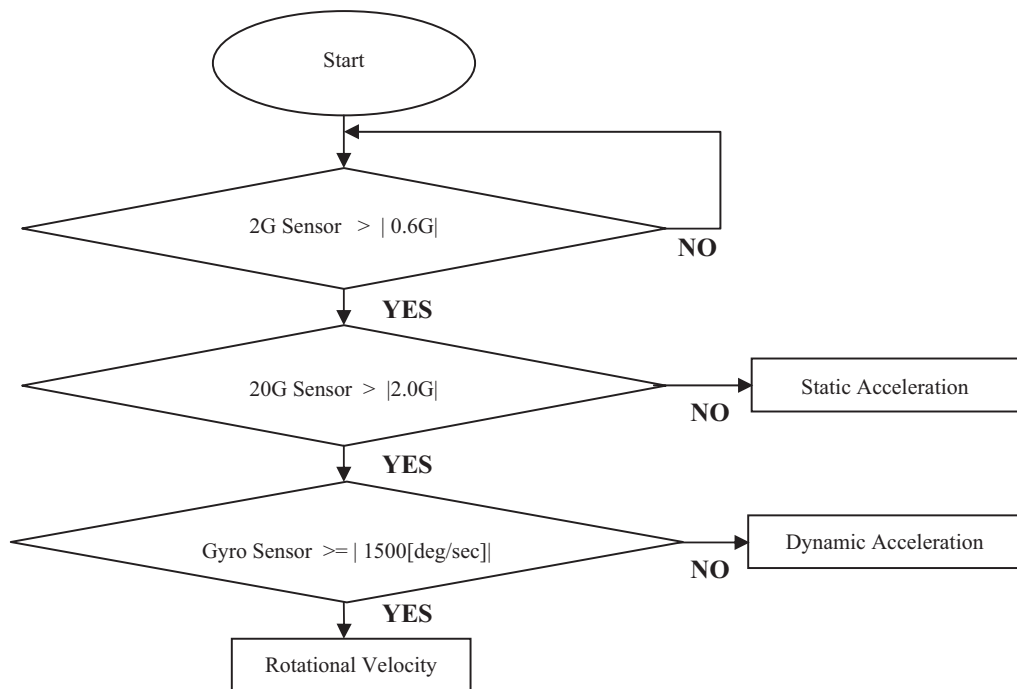


Fig. 5 Flow chart of hand gesture recognition

less than 2G, static acceleration is estimated. When the 20G sensor detects the absolute value greater than or equal to 2G, dynamic acceleration or rotational velocity is estimated. When the absolute value of angular velocity is greater than or equal to 1500[deg/s], rotation is estimated. In this case, the sign

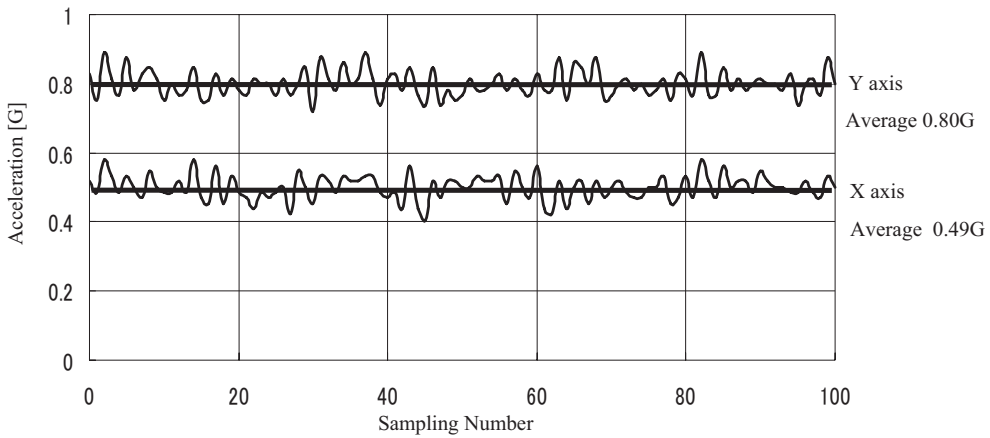


Fig.6 Example of static acceleration data

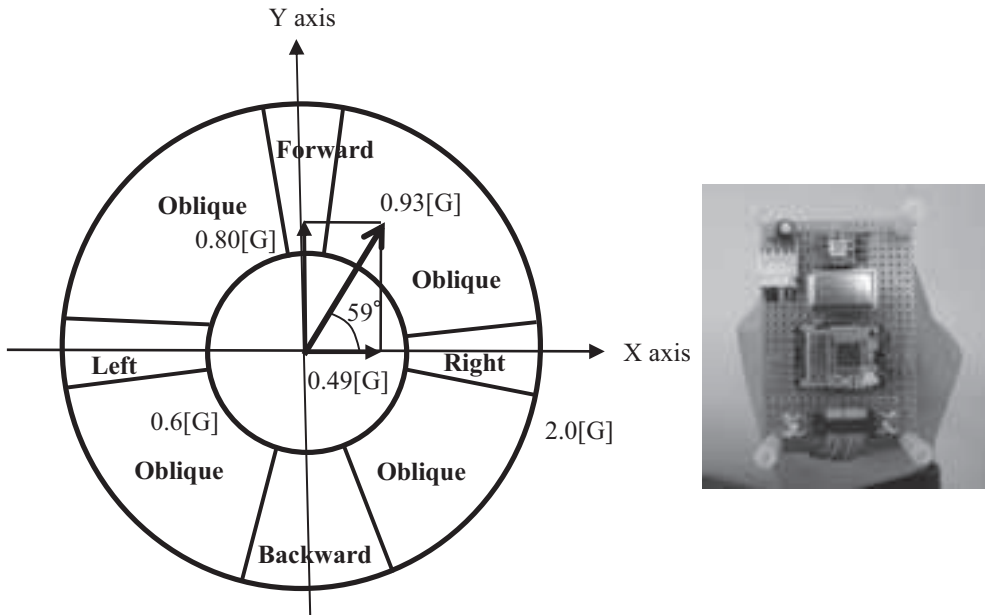


Fig.7 Classification of static acceleration

of speed shows rotational direction. Finally, when the absolute value is less than 1500[deg/s], dynamic acceleration is estimated.

In case of static acceleration, 100 sampling data of X and Y axes are averaged and the absolute value together with direction is calculated. For example, experimental data shown in Fig.6 gives us the average value of acceleration along X and Y axes to be 0.49G and 0.80G, respectively. This experimental data also gives us the absolute static acceleration value 0.93G with direction 59 degree. Fig.7 shows that directions of 80~100, 250~290, 350~10 and 170~190 degrees are supposed to be

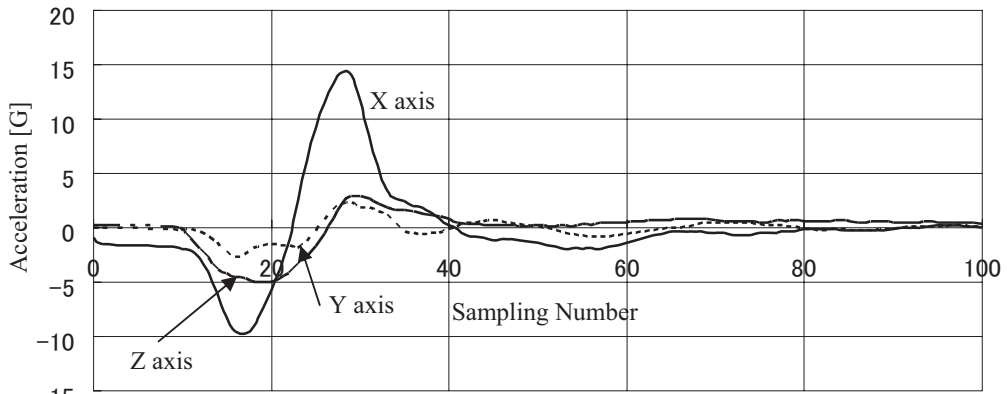


Fig.8 Example of dynamic acceleration data

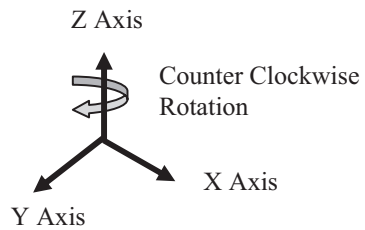
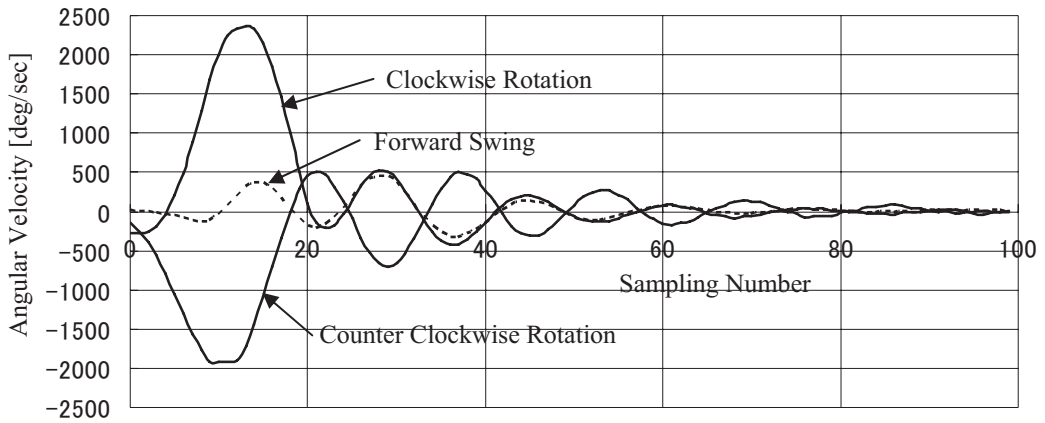


Fig.9 Rotational speed data obtained by gyro sensor and corresponding coordinate of the hand gesture apparatus

forward, backward right and left, respectively. Other directions correspond oblique. In case of dynamic acceleration shown Fig.8, the peak-to-peak values evaluated from 100 sampling data of X, Y and Z axes yield the swing axis and its positive or negative region which are judged by the order of maximum and minimum values. The data of rotational velocities are shown in Fig.9, and they show

that the clockwise and counter clockwise rotations are different from the forward swing action.

In order to estimate the sensor accuracy of static and dynamic acceleration, 4 persons tried 20 times to manipulate hand gesture with respect to X and Y axes. As a result, 95% correct answers were obtained in static acceleration, and 78% in dynamic acceleration. In this way, static acceleration gave the recognition rate better than dynamic one. This result means that, in case of static acceleration, there was no need of exercise but in dynamic acceleration, it was necessary to exercise further.

4. Performance of a mobile robot by hand gesture

It is desirable that the hand gesture corresponds one to one to mobile robot manipulation, because the user can intuitively manipulate the robot. To do this, correspondence between hand gesture and manipulation of the mobile robot was determined and is shown in table1, where coordinates of robot movement are fixed to a mobile robot. According to this correspondence, for example, when the user declines his hand forward, the robot moves forward, and swinging forward his hand gives speed up of the mobile robot.

5. Experiment

The experiments manipulating a mobile robot by utilizing the gesture apparatus were done. Hand gesture was recognized normally and then the robot operated according to kinds of gesture given. A combination of forward movement, rotation and circulation can freely move the mobile robot anywhere. Fig.10 shows the robot moving forward according to forward declination of hand. As hand

Table1 Correspondence between hand gesture and manipulation of mobile robot

	Hand Gesture	Manipulation of Mobile Robot
Declination	Forward (80–100degree)	Forward Movement
	Backward (250–290degree)	Stop
	Right (350–10degree)	Low Speed Clockwise Rotation
	Left (170–190degree)	Low Speed Counter Clockwise Rotation
	Oblique	Circulation
Swing	Forward (Y+)	Speed Up
	Backward (Y-)	Speed Down
	Right (X+)	90Degree Clockwise Rotation
	Left (X-)	90Degree Counter Clockwise Rotation
	Above (Z+), Below (Z-)	Speed Reset
Rotation	Clockwise	High Speed Clockwise Rotation
	Counter Clockwise	High Speed Counter Clockwise Rotation

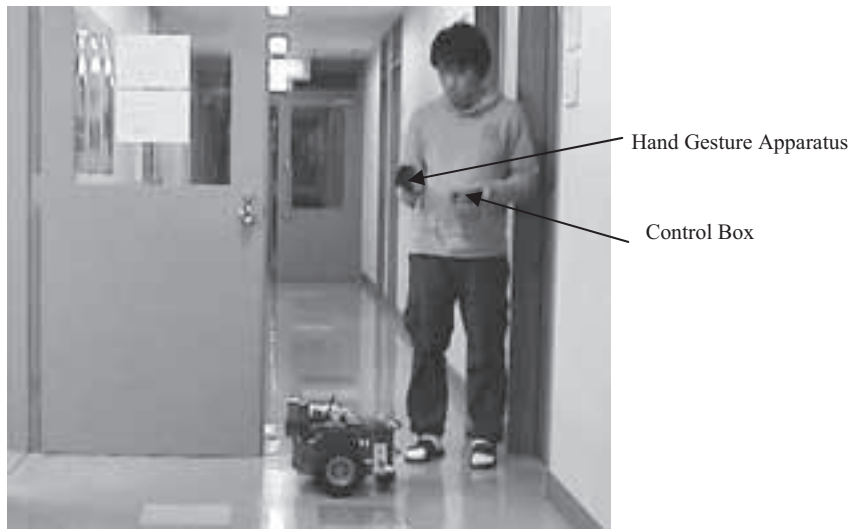


Fig. 10 Experiment of hand gesture manipulation to mobile robot

gesture corresponds to movement of a robot, the operator can intuitively recognize its movement. When the robot moves forward, ultrasonic distance sensors attached to the front panel of the robot can detect obstacles to stop automatically. When the sensors missed detection of obstacle, the operator pushes the emergency stop- switch and then the robot can stop in a moment. Also, the sound board mounted on the robot announces manipulation corresponding to hand gesture.

It is easy for an operator to recognize one's gesture. The present hand gesture system utilizes a wireless communication apparatus and then, an operator is able to manipulate the robot when distance between an operator and a robot becomes large. This apparatus does not restrict relative angle between an operator and a robot. It is also easy to carry the whole system.

6. Conclusions

Proposed apparatus can recognize hand gesture easily and correctly, and manipulate a mobile robot intuitively. By applying acceleration sensors and the gyro sensor to recognize hand gesture, we could construct an inexpensive apparatus of hand gesture recognition for a mobile robot. At the present time, 12 kinds of hand gesture are available to robot manipulation and are greater than 7 plus minus 2 (Mirror's magic number[10]). Furthermore, we have to adopt more essential gesture to mobile robot manipulation. If it is available for a mobile robot to acquire relative position with respect to operator by using sensor arrays, more easy-to-understand gesture, such as beckoning will be able to realize by utilizing this apparatus.

Acknowledgement

We wish to thank Dr. Takai for his kind comments. This research is supported by a research project of High-Tech-Research Center, Hokkai-Gakuen University.

References

- [1] R.D.Schraft and G.Schmierer, *Service Robots, Products Scenarios Visions*, A K Peters, 2000.
- [2] S.Numazaki, A.Morishita, N.Umeki and M.Do, "A Image Input Device for Gesture Interface and It's Performance of Detecting 3-Dimensional Information", *Journal of Information Processing Society of Japan*, vol.41, pp.1267-1275, 2000.
- [3] K.Tsukada and M.Yasumura, "Ubi-Finger : Gesture Input Device for Mobile Use", *Journal of Information Processing Society of Japan*, vol.43, pp.3675-3684, 2002.
- [4] K.Yatani, T.Kishimura, K.Tamura, M.Sugimoto and H.Hashizume, "Toss-It : Intuitive Information Transfer Techniques for Mobile Devices", *Technical report of IEICE*, vol.104, pp.19-24, 2004.
- [5] S. Iba, J.M.Vande Weghe, C.Paredis, and P.Khosla, "An Architecture for Gesture Based Control of Mobile Robots", *Proceedings of the IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS'99)*, pp.851-857, October, 1999.
- [6] T.Murashima, Y.Kuno, N.Shimada and Y.Shirai, "Understanding and Learning of Gesture through Human-Machine Interaction", *JRSJ*, vol.18, pp.590-599, 2000.
- [7] M.Strobel, J.Illmann, B.Kluge and F.Marrone, "Gesture Recognition in a Spatial Context for Commanding a Domestic Service Robot", *In Proc. of the 33rd International Symposium on Robotics (ISR)*, 2002.
- [8] K.Kojo, T.Inamura, K.Okada and M.Inaba, "Gesture Recognition by Humanoid robots using Proto-symbol Space", *The 24th Annual Conference of the Robot Society of Japan*, 1M11, 2006.
- [9] J.Richarz, A.Scheidig, C.Martin, S.Muller and H.Gross, "A Monocular Pointing Pose Estimator for Gesture Instruction of a Mobile Robot", *International Journal of Advanced Robotic Systems*, vol.4, pp.139-150, "2007.
- [10] G.A.Killer, "The magical number seven plus or minus two : Some limits on our capacity for processing information", *Psychol.*, Rev.63, pp.81-97, 1956.